
Flexi™ acoustic wall panel

Fabric wrapped panel, bevel edged or straight edged, for walls

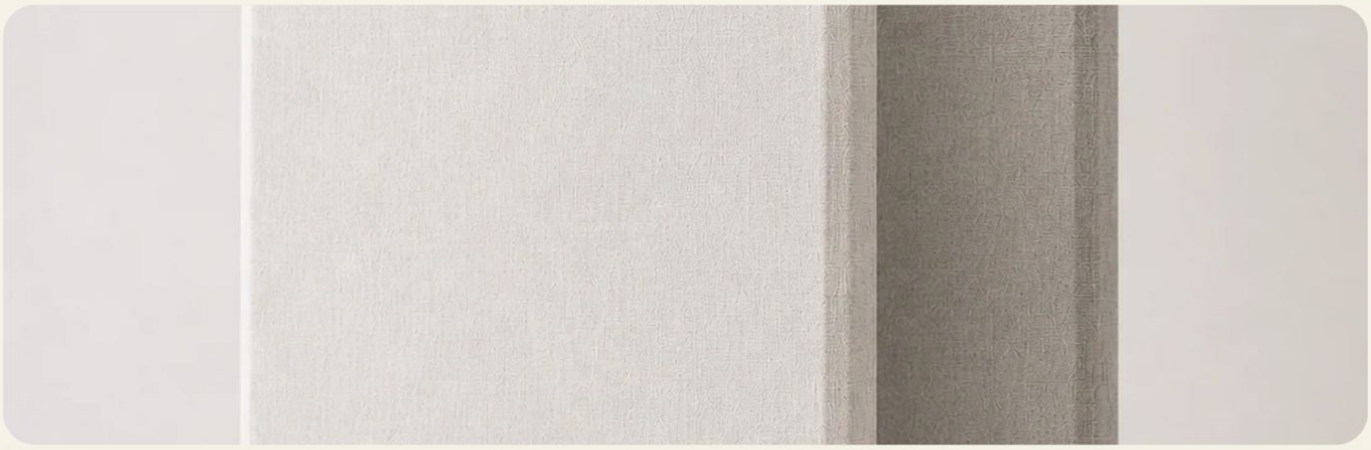

Sizes	600 × 600 mm · 1200 × 600 mm (standard) · 1800 × 600 mm (tall) · Custom sizes on request
Thickness	25 mm or 50 mm
Acoustic	NRC 1.00 at 50 mm, NRC 0.80 at 25 mm (ASTM C423, mounting A). Weighted αw 0.90 (EN ISO 354 / EN ISO 11654, core test, SGS report)
Core	Formed semi-rigid inorganic glass fibre, 96 kg/m³, resin-hardened edges, glass tissue micro-mesh backing. Up to 51% recycled content
Face	Acoustically transparent polyester fabric, 39 standard colours; or paintable white glass fibre tissue face
Edges	Bevel edged (standard) or straight edged
Weight	About 4 kg for 1200 × 600 × 50 mm
Fixing	Impaling clips and adhesive (no drilling), or mechanical clips on board and masonry
Typical use	Meeting rooms, offices, restaurants, classrooms, studios, homes
Colours	39 standard Flexi™ fabric colours; physical swatch card on request
Fire and emissions	Flexi™ core: EN 13501-1 Class A1 (membrane components), formaldehyde not detected, asbestos negative (SGS XMIN180901795CCM). Fabric: UK FFR 1988 Sch. 4/5 Part I pass (SGS SDHL1803005038FB)
Lead time	About 15 working days on our production schedule after the deposit, then delivery; about 4 to 6 weeks to installed
Warranty	1 year on materials and workmanship
Care	Vacuum gently or wipe lightly with a dry or slightly damp cloth. Do not soak or scrub